

Specifications

MODEL **GS™-3384 RT**

MEASUREMENTS	Metric	US
Working height maximum*	12.06 m	39 ft
A Platform height maximum	10.06 m	33 ft
B Platform height - stowed**	1.55 m	5 ft 1 in
C Platform length - standard	3.94 m	12 ft 11.25 in
outside extended - single deck	5.34 m	17 ft 6.25 in
outside extended - dual deck	6.57 m	21 ft 6.5 in
outside extended - super deck	7.38 m	24 ft 2.5 in
D Slide-out platform extension deck - front	1.52 m	5 ft
E Slide-out platform extension deck - rear	1.22 m	4 ft
F Platform width - outside	1.83 m	6 ft
G Height - stowed: folding guardrails rails lowered	2.68 m / 2 m	8 ft 9.5 in / 6 ft 6.75 in
H Length - stowed: single deck	3.94 m	12 ft 11.25 in
dual deck	3.98 m	13 ft 5 in
super deck	4.81 m	15 ft 9.5 in
with outriggers	4.88 m	16 ft
I Width	2.13 m	7 ft
J Wheelbase	2.84 m	9 ft 4 in
K Ground clearance - centre	33 cm	13 in

PRODUCTIVITY

Max platform occupancy	7	7
Lift capacity	1,134 kg	2,500 lbs
Drive height		Full height
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed***	50%	50%
Maximum outrigger levelling****	7° (front to back) / 12° (side to side)	
Turning radius - inside	3.09 m	10 ft 1.5 in
Turning radius - outside	5.94 m	19 ft 6 in
Raise/lower speed	45/29 sec	45/29 sec
Controls	proportional	proportional
Drive	four wheel	four wheel
Tyres - foam-filled rough terrain	25 x 79 cm	10 x 31 in

POWER

Power source	Deutz diesel D2011L03i 49 hp (36 kW), air cooled Ford DSG-423 75 hp petrol/LPG (56 kW) water cooled	
Auxiliary power unit	12 V DC	12 V DC
Fuel tank capacity	113.6 L	30 gal
Hydraulic system capacity	113.6 L	30 gal


SOUND & VIBRATION LEVELS

Sound pressure level (ground workstation)	88 dBA	88 dBA
Sound pressure level (platform workstation)	78 dBA	78 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²

WEIGHT*****

CE base machine	5,445 kg	12,002 lbs
The basic unit has the single extension deck, diesel motor, no outriggers (except standard on GS-5390RT), foam-filled or non-marking tyres, CE link guard and CE load sense.		
Unit weight modifiers for options		
Outriggers	add 760 kg	1,675 lbs
Dual extension decks	add 356 kg	784 lbs
Super deck	add 411 kg	906 lbs
Generator/Inverter	add 48 kg	105 lbs

STANDARDS COMPLIANCE CE EN280, PB-10-611-03

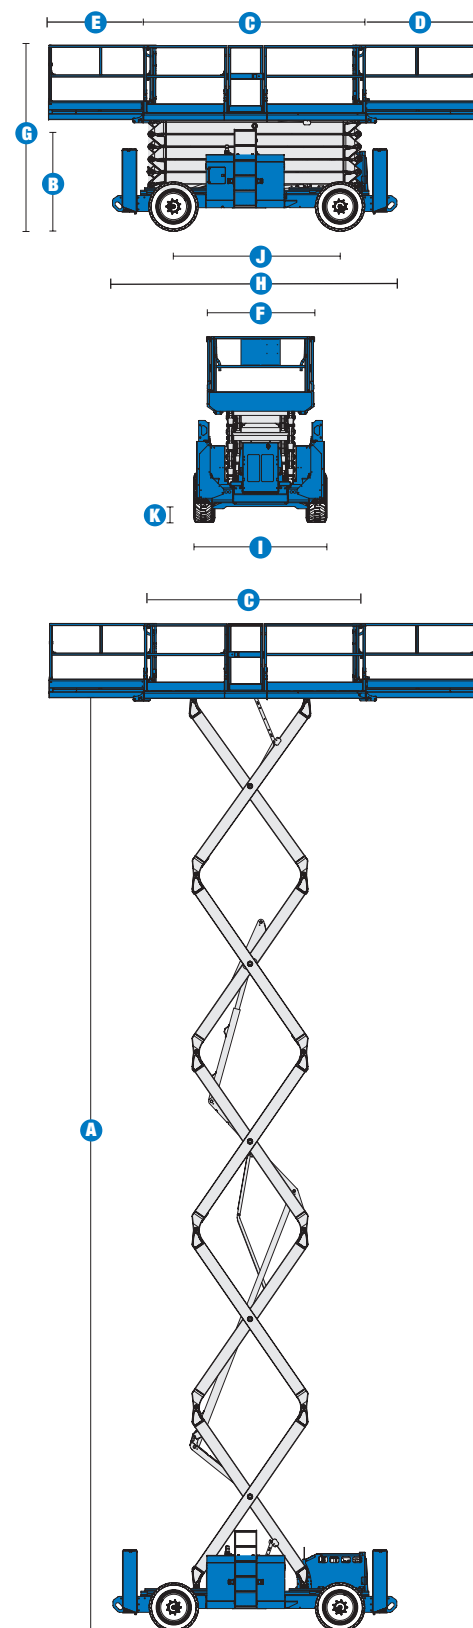

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Based on RT tyres. Deduct 2 in (5.08 cm) and non-marking.

*** Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.

**** Outriggers are optional

***** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lb) lift capacity

PRODUCTIVITY

- 3.94 x 1.83 m (12 ft 11.25 in x 6 ft) steel frame platform
- 1.52 m (5 ft) extension deck
- Replaceable aluminium deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full-height swing gate
- Two self-closing gates
- 4x4
- Positive traction control
- Four-wheel dynamic braking
- Slide-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified load sensor

POWER

- Deutz diesel 49 hp (36 kW)
- Ford Petrol/LPG 75 hp (56 kW)
- Hydraulic oil cooler



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Power to platform (plug, socket and ground fault interrupt earth leakage on request)
- Dual slide-out platform extension deck package 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- 7.30 m (24 ft) super deck extension package
- Automatic levelling hydraulic outriggers
- Air line to platform
- Non-marking, foam filled, rough terrain tyres
- Dual flashing beacons
- Platform work lights*
- Motion alarm
- Biodegradable oil

POWER

- 3000 AC watt generator
- Diesel catalytic scrubber muffler
- Engine heater
- LPG steel tank only, 33.5 lb (15 kg) capacity
- Soot filter
- Refinery kit (spark arrestor + electric Chalwyn valve)

*Available aftermarket only