

Power Scissor 500/600

**maintenance free
access up to 6m**



BS EN 280:2001 Group A




Manufactured in the UK

- Secure platform for working heights of up to 6m (*powerscissor 600*)
- NO batteries, NO Electrics, NO pumps = Hassle free operation
- No requirement for LOLER Checks
- Platform capacity of 120kg – ample for one person plus tools
- Can be pushed through single doorway and stored in compact area
- Can be used indoors or outdoors (rated up to 20mph winds)
- Quick and easy to set-up and operate



Compact dimensions enable the Powerscissor to be easily pushed through a standard single doorway.

Powerscissor 500/600

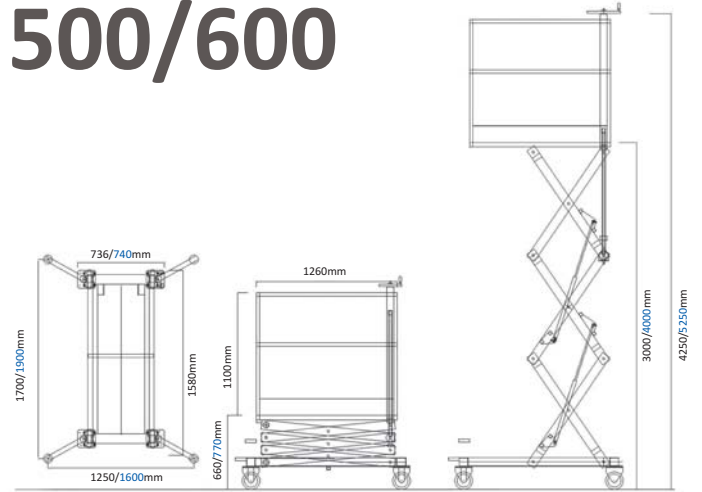

N.B. Powerscissor 600 measurements are indicated in blue

Specification		
	PS500	PS600
Working Height	5.0m	6.0m
Safe Working Load	120kg	120kg
Min Platform Height	0.66m	0.77m
Platform Size	0.6m x 1.26m	0.6m x 1.26m
Stowed Height	1.88m	2.01m
Stowed Length	1.58m	1.58m
Stowed Width	0.74m	0.74m
Working Footprint stabilisers out	1.7m x 1.25m	1.9m x 1.6m
Total Weight	290kg	340kg



Outriggers can be deployed quickly - can be positioned for access against walled areas



Lockable Castor wheels



Fork lift points if required to move across site



The Powerscissor is simple to operate – turn the handle up or down to gain desired height (pictured bottom), or by electric power drill, with supplied attachment (pictured top)



Platform can be placed in a number of positions to reach the ideal working level

Product specifications are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment.

Distributed By: