

Specifications

MODELS	GS™-2668 DC		GS™-3268 DC	
MEASUREMENTS	Metric	US	Metric	US
Working height maximum*	9.92 m	32 ft	11.75 m	38 ft
A Platform height	7.92 m	26 ft	9.75 m	32 ft
B Platform height - stowed	1.19 m	3 ft 11 in	1.31 m	4 ft 4 in
C Platform length - outside	2.51 m	8 ft 3 in	2.51 m	8 ft 3 in
extended	3.61 m	11 ft 8 in	3.61 m	11 ft 8 in
Slide-out platform extension	1.15 m	3 ft 9 in	1.15 m	3 ft 9 in
D Platform width - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Toeboard height	15 cm	6 in	15 cm	6 in
E Height - stowed	2.32 m	7 ft 5.5 in	2.57 m	8 ft 4 in
rails lowered	1.70 m	5 ft 7 in	1.83 m	6 ft
F Length - stowed	2.67 m	8 ft 9 in	2.67 m	8 ft 9 in
platform extended	3.75 m	12 ft 4 in	3.75 m	12 ft 4 in
G Width	1.73 m	5 ft 8 in	1.73 m	5 ft 8 in
H Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
I Ground clearance - centre	20 cm	8 in	20 cm	8 in




PRODUCTIVITY				
Maximum platform occupancy (indoor/outdoor)	4/4	4/4	4/2	4/2
Lift capacity	567 kg	1,250 lbs	454 kg	1,000 lbs
Drive speed - stowed	4.8 km/h	3.0 mph	4.8 km/h	3.0 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability - stowed**	30%	30%	25%	25%
Turning radius - inside	1.52 m	5 ft	1.52 m	5 ft
Turning radius - outside	3.68 m	12 ft 1 in	3.68 m	12 ft 1 in
Raise/lower speed	30/35 sec	30/35 sec	40/37 sec	40/37 sec
Controls	proportional		proportional	
Drive	dual rear wheel		dual rear wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - low profile foam filled turf	32 x 56 cm	12.5 x 22 in	32 x 56 cm	12.5 x 22 in
Tyres - non-marking	22 x 55 cm	9 x 21.5 in	22 x 55 cm	9 x 21.5 in

POWER				
Power source	48 V DC (eight 225 Ah batteries)		48 V DC (eight 225 Ah batteries)	
Hydraulic system capacity	36 L	9.5 gal	36 L	9.5 gal

SOUND & VIBRATION LEVELS				
Sound pressure level (ground workstation)	<70 dBA		<70 dBA	
Sound pressure level (platform workstation)	<70 dBA		<70 dBA	
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²

WEIGHT***				
CE standard	3,106 kg	6,847 lbs	3,674 kg	8,098 lbs
CE max	3,153 kg	6,952 lbs	3,721 kg	8,203 lbs

STANDARDS COMPLIANCE CE EN280, PB-10-611-03

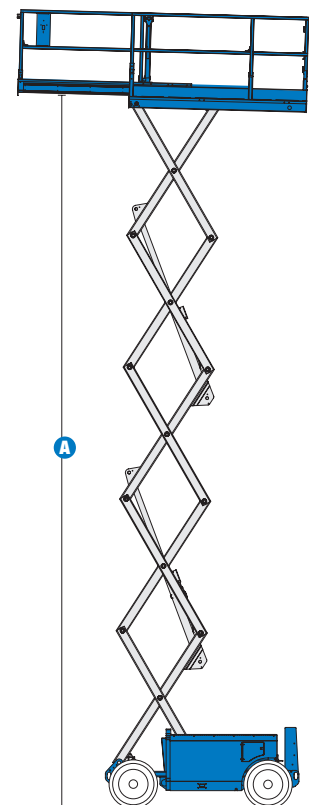

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

*** Weight varies depending on options and country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2668 DC

- 9.92 m (32 ft) working height
- Up to 567 kg (1,250 lb) lift capacity

GS™-3268 DC

- 11.75 m (38 ft) working height
- Up to 454 kg (1,000 lb) lift capacity

PRODUCTIVITY

- 2.51 x 1.15 m (8 ft 3 in x 3 ft 9 in)
- 1.10 m (3 ft 6 in) extension deck
- Folding guardrails
- Dual rear wheel drive
- Automatic battery charger
- Proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- AC power to platform
- Full height swing gate
- Diamond plate deck
- Lanyard attachment points
- Manual platform lowering valve
- Dual rear wheel multiple disc brakes
- Manual brake release
- Low profile foam filled turf tyres
- Tilt sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified load sensor

POWER

- 48 V DC system
(eight 6 V 225 Ah batteries)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Power to platform (plug, socket and ground fault interrupt earth leakage on request)
- Solid non-marking tyres 22 x 55 cm (9 x 21.5 in)
- Dual flashing beacons
- Platform work lights*
- Motion alarm
- Biodegradable hydraulic oil

*Available aftermarket only